# **GENERAC**®

## **GP6000E**

#### GP SERIES Commercial/Residential Portable Generators

1 of 2

#### Features


- **The Generac OHV engine** incorporates splash lubrication and provides long life.
- **One-touch automatic electric start** with external plug-in battery charger to keep battery charged and ready to go.
- Large-capacity steel fuel tank with incorporated fuel gauge provides durability and extended run times.
- **Low-oil level shutdown** automatically safeguards engine from damage.
- Circuit breaker protected outlets
- **High leverage fold-down handle** allows easy mobility and storage.
- Never-flat wheels for reliable portability.
- Hardened 1 1/4" steel tube cradle for added strength and durability.
- Hour Meter tracks usage for proper service intervals.

### **Control Panel**

Model 6219-0 UPC: 696471062199 (GOST-R)



AC Rated Output Running Watts 6000 AC Maximum Output Starting Watts 9000

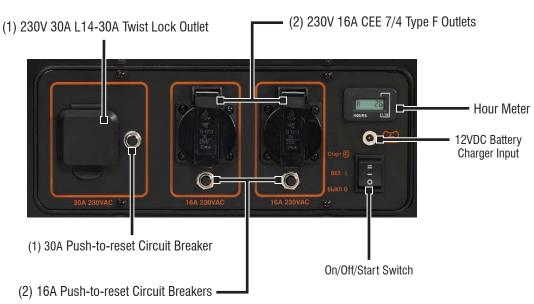


### **Specifications**


| Product Series                          | GP6000E                    |
|---|----------------------------|
| Model                                   | 6219-0                     |
| Configuration/Emissions                 | GOST-R                     |
| AC Rated Output Running Watts:          | 6000                       |
| AC Maximum Output Motor Starting Watts: | 9000                       |
| AC Voltage                              | 230 VAC                    |
| AC Frequency                            | 50 Hz                      |
| Rated VAC Amperage                      | 26.1                       |
| Engine Displacement                     | 420cc                      |
| Engine Type                             | OHV                        |
| Engine RPM                              | 3000                       |
| Recommended Oil                         | 10W-30 / SAE30             |
| Lubrication Method                      | Splash                     |
| Automatic Voltage Regulation (AVR)      | Yes                        |
| Choke Location                          | On Engine                  |
| Fuel Shut Off                           | On Fuel Tank               |
| Starting Method                         | Electric/Recoil Pull Start |
| Battery                                 | Yes                        |
| Battery Type                            | 12 VDC                     |
| Battery Wall Charger Adapter            | Included                   |
| Low Oil Shutdown Method                 | Low Level                  |
|   |                            |

| Start Switch Type             | On/Off/Start Switch                                 |
|-------------------------------|---|
| Switch Location               | On Control Panel                                    |
| Fuel Gauge                    | Built-In Tank                                       |
| Fuel Tank Capacity Ltrs (Gal) | 30 (8)  |
| Run Time at 50% (Hours)       | 10.5  |
| Cord Set                      | 1m Long 30A Twistlock to 32A<br>230V Euro Connector |
| Handle Style                  | Fold-down locking                                   |
| Wheel type mm (in)            | 241 (9.5) Solid                                     |
| Maintenance Kit               | Sold separately                                     |
| Warranty - Residential        | 2 Year Ltd  |
| Warranty - Commercial         | 1 Year Ltd  |
|                               |   |

Dimensions and Weights

| Length mm (in)           | 692 (27.25)  |
|--------------------------|--------------|
| Width mm (in)            | 687 (27)     |
| Height mm (in)           | 638 (25)     |
| Extended Length mm (in)  | 1135 (44.75) |
| Carton Length mm (in)    | 802 (31.5)   |
| Carton Width mm (in)     | 559 (22)     |
| Carton Height mm (in)    | 614 (24)     |
| Unit Weight kg (lbs)     | 89 (195.5)   |
| Shipping Weight kg (Ibs) | 97 (214)     |
|                          |              |







2 of 2