

# LP3250

## LP SERIES Commercial/Residential Portable Generators

### Features

- **Propane fuel** is safer, more stable, and has a longer shelf life than gasoline.
- **Integrated propane tank holder** accepts either 20lb or 30lb propane canisters for flexibility, convenience and extended runtimes.
- **20 lb tank** provides 9.0 hour runtime, comparable to runtime of the same size portable gasoline generators. (LP Fuel Cylinder not included)
- **Dolly-style handle and low grab bar** increases maneuverability; handle folds down for compact storage.
- **Low-oil level shutdown** automatically safeguards engine from damage.
- **Covered outlets** provides added protection from the environment.
- **Circuit breakers** provide overload protection.
- **Generac's OHV engine** incorporates splash lubrication and provides long life.
- **Conveniently located fuel line** quickly connects to standard LP tanks.
- **First oil Included.**
- **Wheel kit included**
- **Hardened 1 1/4" steel tube cradle** for added durability and strength.
- **Heavy-duty, never-flat wheels** for reliable portability.

**Model 6000-0** UPC: 696471060003  
(EPA/49-State)

**Model 6000-1** UPC: 696471060003  
(EPA/50-State)




Not for Sale in the City of LA

**AC Rated Output Running Watts 3250**  
**AC Maximum Output Starting Watts 3750**

### 50-State Control Panel

(1) 120/240V 20A L14-20R Twist Lock Outlet

(2) 15A Circuit Breakers

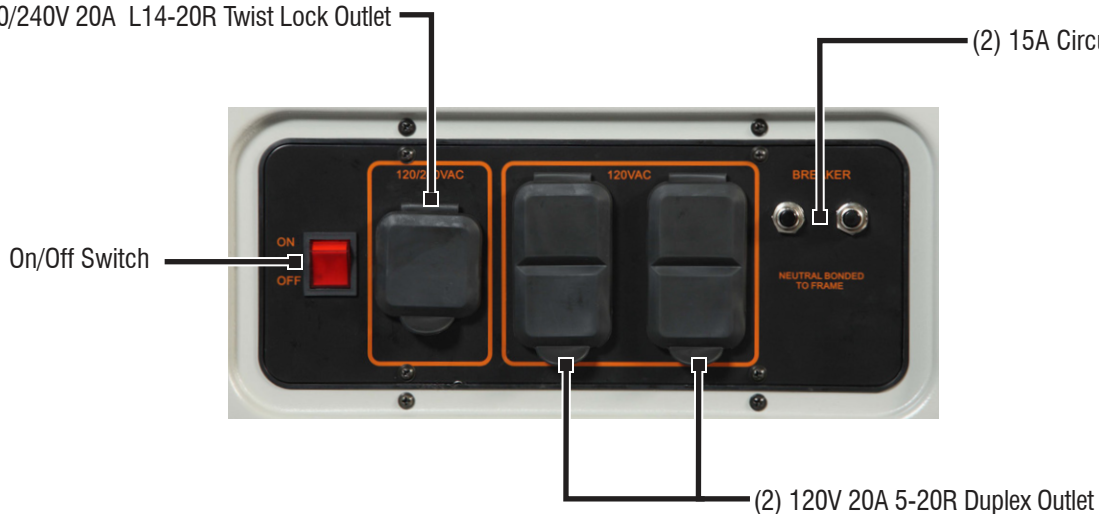

# LP3250

## specifications

|   |                   |
|---|-------------------|
| Product Series                          | LP3250            |
| Model                                   | 6000-1            |
| Configuration/Emissions                 | EPA/50-State      |
| AC Rated Output Running Watts:          | 3250              |
| AC Maximum Output Motor Starting Watts: | 3750              |
| AC Voltage                              | 120/240 VAC       |
| AC Frequency                            | 60 Hz             |
| Rated VAC Amperage                      | 27.1/13.5         |
| Max Rated VAC Amperage                  | 31.25/15.63       |
| Engine Displacement                     | 212cc             |
| Engine Type                             | OHV               |
| Engine RPM                              | 3600              |
| Recommended Oil                         | 10W-30 / SAE30    |
| Lubrication Method                      | Splash            |
| Automatic Voltage Regulation (AVR)      | Yes               |
| Choke Location                          | On Engine         |
| Fuel Shut Off                           | On Fuel Tank      |
| Starting Method                         | Recoil Pull Start |
| Low Oil Shutdown Method                 | Low Level         |
| Neutral Bonded to Ground                | Yes               |

|                         |                   |
|-------------------------|-------------------|
| Start Switch Type       | On/Off Switch     |
| Switch Location         | On Control Panel  |
| Fuel Gauge              | Built-In Tank     |
| Fuel Tank Capacity (lb) | 20 or 30          |
| Fuel Tank Capacity (kg) | 9.07 or 13.61     |
| Run Time at 50% (Hours) | 9 hrs or 13.5 hrs |
| Handle Style            | Single Folding    |
| Wheel Type              | 9.5" Solid Wheels |
| Maintenance Kit         | Sold Separately   |
| Warranty - Residential  | 2 Year Ltd        |
| Warranty - Commercial   | 1 Year Ltd        |

## Dimensions and Weights

|                          |              |
|--------------------------|--------------|
| Length in (mm)           | 39 (989)     |
| Width in (mm)            | 23.75 (599)  |
| Height in (mm)           | 24.75 (627)  |
| Extended Length in (mm)  | 42.75 (1086) |
| Carton Length in (mm)    | 35 (890)     |
| Carton Width in (mm)     | 19.25 (490)  |
| Carton Height in (mm)    | 23.25 (590)  |
| Unit Weight lbs (kg)     | 137 (62.14)  |
| Shipping Weight lbs (kg) | 151 (68.5)   |

