

LP5500

LP SERIES Commercial/Residential Portable Generators

Features


Model 6001-0 UPC: 696471060010
50ST (Not City of LA)

- **Propane fuel** is safer, more stable, and has a longer shelf life and lower emissions than gasoline.
- **Integrated propane tank holder** accepts either 20lb or 30lb propane cylinders for flexibility, convenience and extended runtimes.
- **Power Dial™** includes all engine functions in one simple control.
- **Dolly-style handle and low grab bar** increases maneuverability; handle folds down for compact storage.
- **Low-oil level shutdown** automatically safeguards engine from damage.
- **Covered outlets** provides added protection from the environment.
- **Circuit breakers** provide overload protection.
- **Generac's OHV engine** incorporates splash lubrication and provides long life.
- **Conveniently located fuel line** quickly connects to standard LP tanks.
- **Quick-access enclosure** is detachable for easy engine maintenance.
- **Hardened 1 1/4" steel tube cradle** for added durability and strength.
- **Hour meter** tracks maintenance intervals.
- **Heavy-duty, never-flat wheels** for reliable portability.
- **First oil Included.**



AC Rated Output Running Watts 5500
AC Maximum Output Starting Watts 6875

50-State Control Panel

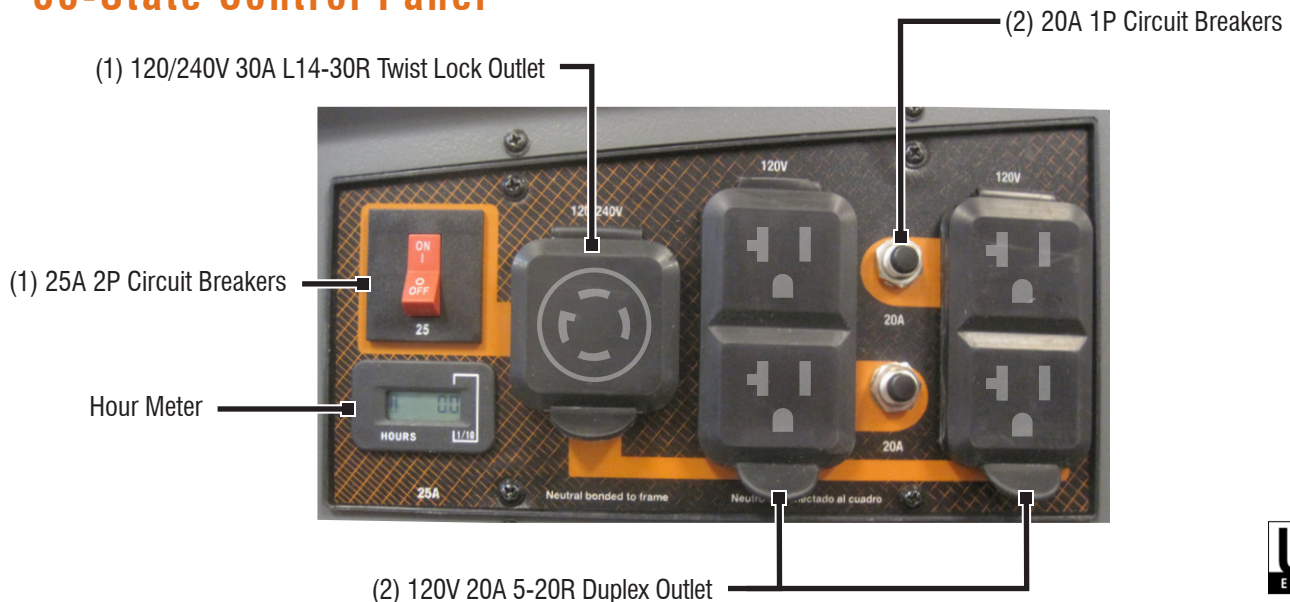

LP5500

specifications

Product Series	LP5500
Model	6001-0
Configuration/Emissions	EPA, CARB
AC Rated Output Running Watts:	5500
AC Maximum Output Motor Starting Watts:	6875
AC Voltage	120/240 VAC
AC Frequency	60 Hz
Rated VAC Amperage	45.8/22.9
Max Rated VAC Amperage	59.3/28.6
Engine Displacement	389cc
Engine Type	OHV
Engine RPM	3600
Recommended Oil	10W-30 / SAE30
Lubrication Method	Splash
Automatic Voltage Regulation (AVR)	Yes
Choke Location	PowerDial™
Fuel Shut Off	On Cylinder
Starting Method	Recoil Pull Start
Low Oil Shutdown Method	Low Level
Neutral Bonded to Ground	Yes

Start Switch Type	PowerDial™
Fuel Gauge	No
Fuel Cylinder Capacity (lb)	20 or 30
Fuel Cylinder Capacity (kg)	9.07 or 13.61
Run Time at 50% (Hours)	4.75 or 7
Handle Style	Single Folding
Wheel Type	10" Solid Wheels
Maintenance Kit	Sold Separately
Warranty - Residential	2 Year Ltd
Warranty - Commercial	1 Year Ltd

Dimensions and Weights

Length in (mm)	35.5 (900)
Width in (mm)	26.3 (669)
Height in (mm)	36.5 (921)
Extended Length in (mm)	47.25 (1201)
Carton Length in (mm)	36 (915)
Carton Width in (mm)	20.25 (515)
Carton Height in (mm)	25 (635)
Unit Weight lbs (kg)	184 (83.5)
Shipping Weight lbs (kg)	198 (90)

